




Used in
grocery stores
or general
retailing for
commodity
weighing.

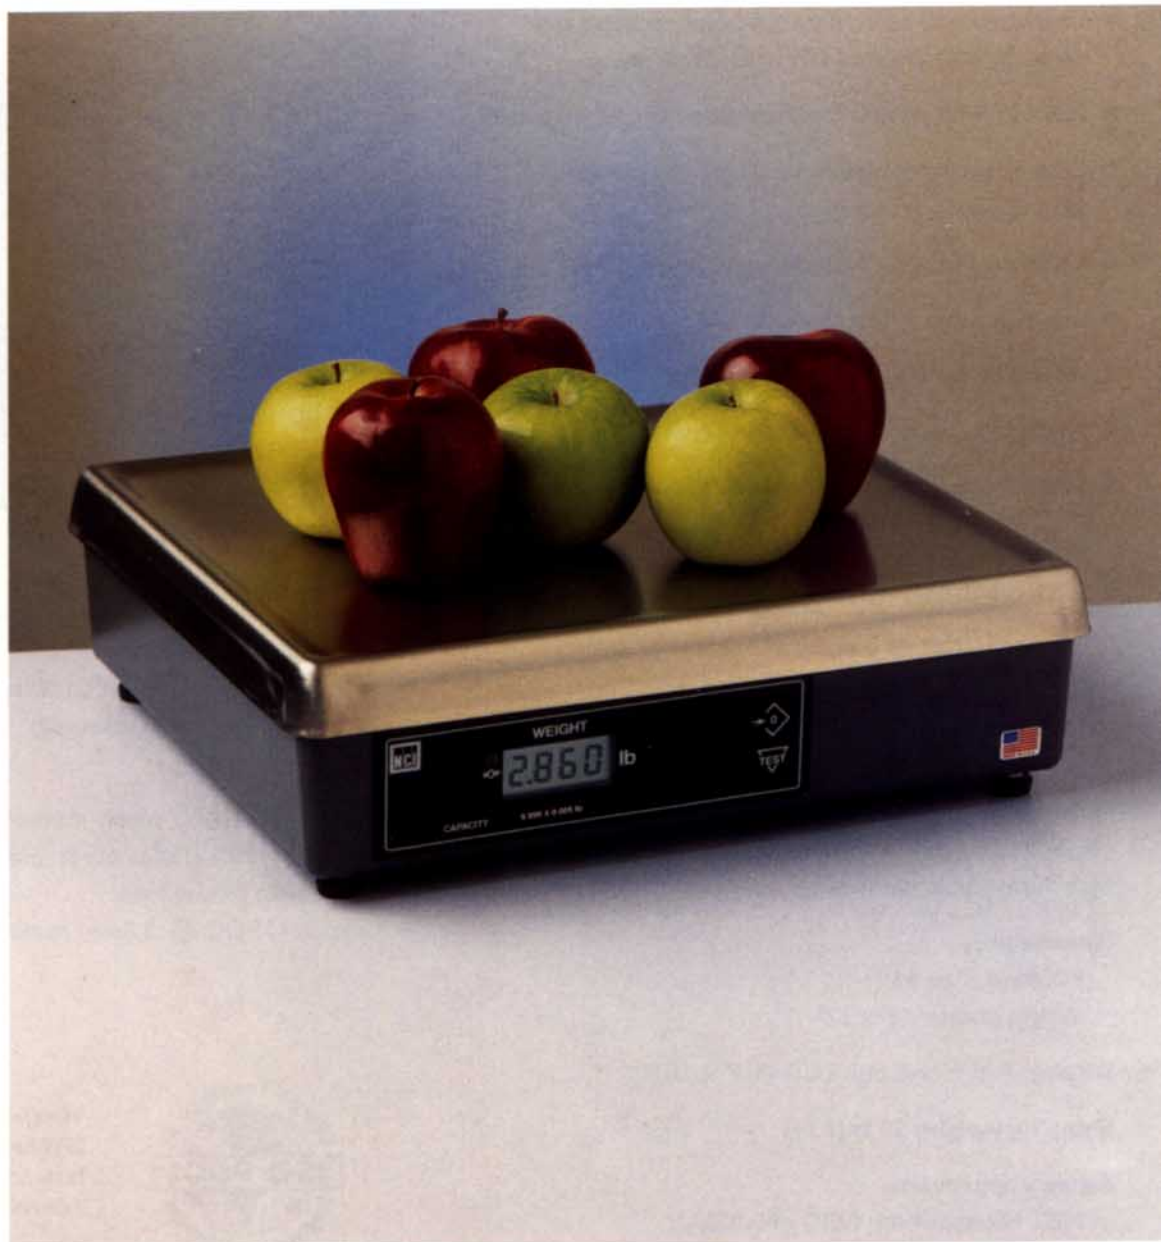

Model 6720

Point-of-Sale Interface Scale for linking to
electronic cash register or computers

Model 6720 Point-of-Sale Interface Scale

Features

- Simple operation
- Low profile
- Small footprint
- Fast weight response
- Accurate
- Reliable
- Interfaces to all major electronic cash registers and computers for point-of-sale operations
- RS-232 / 4-bit parallel interfaces internally – configurable
- Dual measurement, pounds / kilograms selectable from display in set-up mode
- Calibration– Digital from display in set-up mode
- Self-diagnostics in test mode
- All maintenance adjustment – top side
- Quick disconnects at rear of scale for all external connections
- Internal display– front mounted 1/2"H up to 6 digit LCD

Options

- Remote display velcro mounting
- Remote display with 12" high stand
- Base-mounted display for additional counter display
- Base only, no display
- 230 or 240 VAC, 50Hz

Optional remote display and stand



Specifications

Scale capacities and resolution:

Pounds	Kilograms
9.995 x .005	7 x .002
30 x .01	9.995 x .005
60 x .02	30 x .01
99.95 x .05	60 x .02

Note: Higher capacities available

Dimensions:

Height: 4.1" to 4.6"

Weight platter: 14" x 12"

Display: 4 digit or 6 digit LCD (4/6" x 5/10")

Shipping weight: 20 lb (9 kg)

Agency approvals:

NIST Handbook 44, COC #95-070A2

Canadian Weights and Measures

UL listed, CSA certified

Operating environment:

41°F to 104°F (5°C to 40°C) (Class III device)
10 to 90% RH (non-condensing)

Power:

Input: In-line power supply mounted in scale cavity
120 VAC (+10% -15%) / 60Hz (±3Hz) standard
3 wire with ground input
Output: 15 VDC @ .3 Amps minimum



Weigh-Tronix Inc

2320 Airport Blvd
Santa Rosa, CA 95403-1098, USA
Telephone: +1 707-527-5555
+1 800-982-6622
Facsimile: +1 707-579-0180
+1 800-847-6743
e-mail: weighсал@nbn.com
<http://www.wt-nci.com>



WEIGH-TRONIX

Weighing Products & Systems